



RUNLUCKY 润莱®



2025  
WATER  
TREATMENT  
SOLUTION

NEW ARRIVAL

新  
品  
上  
市



## 70m<sup>3</sup>/h自动过滤/软化阀F153

70 m<sup>3</sup>/h Automatic Filter Valve/Softener Valve F153



- 进/出排水口及上下布水器连接口  
采用法兰连接

The inlet, outlet and drain, as well as the connection of top and bottom strainer adopts flange connection

- 时间型或流量型可选  
Time clock type or meter type is optional

- 侧装连接,自带支架  
Side-connected, comes with bracket

70 m<sup>3</sup>/h

### 创新双阀芯结构

Innovative dual valve core structure

**过滤**  
Filter

**软化**  
Softener



## 2m<sup>3</sup>/h软水机专用阀F150

Softener Valve Used on Softener F150 2m<sup>3</sup>/h

专利号(Patent No.):ZL202422347401.6



F105  
升级款  
Upgraded  
Version



- 度假模式(软水出水不会倒流进盐箱)  
Vacation mode (No backflow of soft water into the brine tank)

- 干盐箱模式  
Brine dry mode

- 缺盐报警  
Salt shortage alarm

- 顺/逆流再生  
Down-flow and up-flow regeneration

- 再生补软水  
Refill with soft water

- 按比例吸盐、再生  
Proportional brine draw and brine refill



## 双罐串联软化阀F149/F151

Softener Valve for Achieving One Valve on Duplex Tanks in Series F149/F151

专利号(Patent No.):ZL202022865712.3

中英双语自由选择  
Chinese and English are optional

按比例吸盐  
Brine draw proportionally

智能防泄漏  
Intelligent water leakage protection

缺盐报警  
Salt shortage alarm

干盐箱模式  
Brine dry mode

度假模式  
Vacation mode

树脂保养和更换提示  
Resin maintenance and replacement reminder

补软水  
Brine refill with soft water



F149



F151

型号 Model	F149	F151
进/出水口 Inlet/Outlet	G3/4	G3/4
排水口 Drain	NPT3/4	NPT3/4
基座 Base	2.5"-8NPSM	2.5"-8NPSM
中心管 Riser Pipe	1.05" OD	1.05" OD
吸盐口 Brine Tank Connector	G3/8	G3/8
流量 Flow Rate	1.5 m <sup>3</sup> /h	1.5 m <sup>3</sup> /h
再生方式 Regeneration Mode	顺逆流 DF/UF	逆流再生 UF
外形尺寸 Overall Size	204×195×130mm	182×195×109mm

## 42m<sup>3</sup>/h泳池过滤阀F152B

42m<sup>3</sup>/h Swimming Pool Filter Valve F152B

专利号(Patent No.):ZL202022865712.3



顶装法兰连接  
Top mounted flange connection

直接带压操作,无需关闭进水  
Can be operated under pressure without turning off the water inlet

自动反冲洗(时间或压差启动)  
Automatic backwash (By time or pressure)

42 m<sup>3</sup>/h



**Q**

## 多功能净化滤瓶RL-Q20B

Multi-Functional Purification Filter Housing RL-Q20B

专利号(Patent No.):ZL202222332261.6

**RC**

## 双罐串联软水机RL-RC0150

Duplex Tanks Softener Working in Series RL-RC0150

专利号(Patent No.):ZL202421765665.7

- 陶瓷端面密封结构 Ceramic hermetic head faces structure
- 集成运行—旁通—关闭功能 Integrated service-bypass-close function
- 优质食品级材质 High quality food-grade material
- 带泄压按钮, 拆卸滤瓶轻松 Equipped with pressure relief button, easy to disassemble filter housing
- 滤芯更换无需关闭总进水 No need to close the main water inlet when replacing filter element

**新外观**  
New appearance



## CB 纯水机RL-CB100

RO machine RL-CB100


- 一体成型集成水路板设计, 泄漏点少 Integrated waterway board design, fewer leakage points
- 滤芯寿命提醒功能 Filter element life reminder function
- 专用滤芯快拆设计, 换芯方便快捷 Specialized filter element quick-disassembly design, quick and easy to change.



- 体积小巧, 适合厨房水槽下安装 Small size, suitable for installation under kitchen sink
- 可选配备用电池, 带断电应急保护功能 Optional standby battery, power outage emergency protection
- 可选配外置WIFI模块, 带手机远程监控功能 Optional external WiFi module, mobile phone remote monitor function
- 溢流自闭功能(免装溢流管) Overflow self-close function(No overflow pipe required)
- 智能漏水保护功能 Intelligent leakage protection function
- 树脂保养或更换提示和缺盐提示功能 Resin maintenance or replace reminder and salt shortage reminder function
- 度假模式 Vacation mode
- 干盐箱模式 Dry brine tank mode
- 按比例吸盐、再生 Proportional brine draw and brine refill
- 再生补软水 Refill with soft water

**适配F151控制阀**

Suitable for F151 control valve

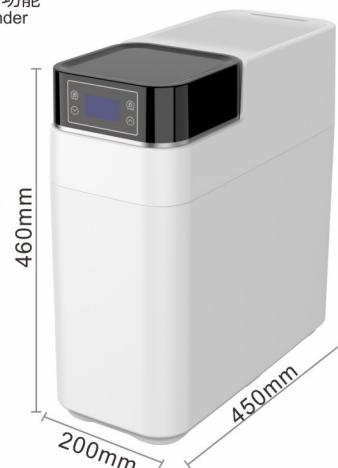

## J 双罐串联中央净水机RL-J55

Duplex Tanks Water Filter Working in Series RL-J55

专利号(Patent No.):ZL202421765665.7

- 可选2.8/3.5"彩屏或3.5"LCD液晶屏 Optional 2.8"/3.5" colorful screen or 3.5"LCD display
- 体积小巧, 适合厨房水槽下安装 Small size, suitable for installation under kitchen sink
- 可选装备用电池, 带断电应急保护功能 Optional standby battery, power outage emergency protection
- 可选配外置WIFI模块, 带手机远程监控功能 Optional external WiFi module, mobile phone remote monitor function
- 智能漏水保护功能 Intelligent leakage protection function
- 滤料更换提醒功能 Filter element replacement reminder function

**适配F151J控制阀**

Suitable for F151J control valve



# RC 分体式双罐串联软水机RL-RC0190

Split Type Duplex Tanks Softener Working in Series RL-RC0190  
专利号(Patent No.):ZL202421765665.7

- 适配2.8/3.5"彩屏或3.5"LCD液晶屏  
Optional 2.8"/3.5" color screen or 3.5" LCD display
- 独立盐箱, 分体结构, 适合厨房水槽下安装  
Independent salt tank, separate structure, suitable for installation under kitchen sink
- 可选装备用电池, 断电应急保护功能  
Optional standby battery, power loss emergency protection
- 可选配外置WIFI模块, 手机远程监控功能  
Optional external WIFI module, mobile phone remote monitor function
- 溢流自闭功能(免装溢流管)  
Overflow self-close function (No overflow pipe required)
- 智能漏水保护功能  
Intelligent leakage protection
- 树脂保养或更换提示  
Resin maintenance or replacement reminder
- 缺盐提示功能  
Salt shortage reminder function
- 度假模式  
Vacation mode
- 干盐箱模式  
Dry brine tank mode
- 按比例吸盐、再生  
Proportional brine draw and brine refill
- 再生补软水  
Refill with soft water

适配F151控制阀

Suitable for F151 control valve



# RB 双罐串联软水机RL-RB0150B

Duplex Tanks Softener Working in Series RL-RB0150B  
专利号(Patent No.):ZL202421765665.7

- 适配2.8寸彩屏或3.5寸LCD液晶屏  
Optional 2.8" colorful screen or 3.5"LCD display
- 智能漏水保护功能  
Intelligent leakage protection
- 树脂保养或更换提示和缺盐提示功能  
Resin maintenance or replacement and salt shortage reminder
- 度假模式  
Vacation mode
- 干盐箱模式  
Dry brine tank mode
- 按比例吸盐、再生  
Proportional brine draw and brine refill
- 再生补软水  
Refill with soft water

新外观  
New appearance

适配 F149、F151控制阀

Suitable for F149, F151 control valve



# SJ 软水机RL-R90SJ/R150SJ

Softener RL-R90SJ/R150SJ


- 适配2.8寸彩屏或3.5寸LCD液晶屏  
Optional 2.8" color screen or 3.5"LCD display
- 适配润新多种型号家用控制阀  
Suitable for multiple models of Runxin residential control valve
- 选配不同控制阀可实现不同功能  
Different functions can be achieved according to different control valve choices



# B 双罐并联软水机RL-RA0100B

Two Tanks Softener Working in Parallel RL-RA0100B  
专利号(Patent No.):ZL201820826973.4

- 双罐并联连续供水  
Two tanks consecutively supply water in parallel
- 单罐额定产水量为 $1\text{m}^3/\text{h}$ , 双罐并联额定产水量为 $2\text{m}^3/\text{h}$   
The rated water capacity of single tank is  $1\text{m}^3/\text{h}$ , and two tanks in parallel is  $2\text{m}^3/\text{h}$
- 体积小巧, 适合厨下安装  
Small size, suitable for installation under kitchen sink
- 全软水再生  
All adopting softened water for regeneration
- 顺/逆流再生  
Down-flow/up-flow regeneration
- 流量即时/延滞型再生  
Meter immediate/delayed regeneration
- 活动式控制器  
Movable controller

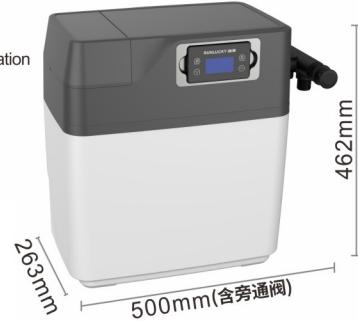

RUNLUCKY 润莱®

## RB 双罐串联软水机RL-RB0150

Duplex Tanks Softener Working in Series RL-RB0150

# “小而不凡”

新品上市  
ARRIVAL  
NEW

专为橱柜下软水设计

品牌承诺  
10年质保

10



18L树脂量适合橱柜安装，尤其大平层橱柜安装

18L resin Suitable for installation under cabinet, especially for large flat unit.

## 双罐串联软水机RL-RB0150

Duplex Tanks Softener Working in Series RL-RB0150

2.8寸彩屏显示

适配F149控制阀

双罐串联供水

Suitable for F149 control valve

配置锂电池, 带断电应急保护功能

溢流自闭功能(免装溢流管)

智能漏水保护

树脂保养或更换提示

缺盐提示功能

度假模式

干盐箱模式

按比例吸盐、再生

再生补软水



- 2.8" color screen display
- Duplex tank working in series to supply water
- Equipped with lithium batteries and featuring power-off emergency protection function
- Overflow shut-off function(No overflow pipe required)
- Intelligent leakage protection function
- Resin maintenance or replacement reminder
- Salt shortage reminder function
- Vacation mode
- Dry brine tank mode
- Proportional brine draw and regeneration
- Refill soft water when regenerating

### 技术参数

Technical parameters

型号 Model	RL-RB0150
建议流量 Suggested flow rate	0.8-1.5 m <sup>3</sup> /h
工作压力 Water Pressure	0.15-0.6MPa
进出水口径 Inlet/Outlet	G3/4
适配罐体 (in) Tank Diameter Range	0915、0815
填装树脂量 Resin volume	18L
外观 (长*宽*高) Overall size (Length×Width×Height)	470*300*539mm

浙江润莱淨水科技股份有限公司

ZHEJIANG RUNLUCKY PURIFICATION TECHNOLOGY CO., LTD.



地址:浙江省丽水市莲都区南明山街道白莲路12号

全国统一免费服务电话 (Service Hotline): 400-873-6361

传真 (Fax): +0578-2120666 E-mail:runlaicrm@run-xin.com



2025-5



“润新阀”出口  
**159**个国家和地区

Runxin Valve has  
been exported to 159  
countries and regions

润景球阀出口  
**36**个国家和地区

Runjing ball valve has  
been exported to 36  
countries and regions

润莱整机出口  
**55**个国家和地区

Runlucky complete machine  
has been exported to 55  
countries and regions



**温州市润新机械制造有限公司**  
WENZHOU RUNXIN MANUFACTURING MACHINE CO.,LTD.

地址:浙江省温州市鹿城区山福镇润新路169号

全国统一免费服务电话 (Service Hotline) : 400-000-2895  
传真 (Fax) : +0577-88633258 E-mail: sales@run-xin.com

**浙江润莱淨水科技股份有限公司**  
ZHEJIANG RUNLUCKY PURIFICATION TECHNOLOGY CO., LTD.

地址:浙江省丽水市莲都区南明山街道白莲路12号

全国统一免费服务电话 (Service Hotline) : 400-873-6361  
传真 (Fax) : +0578-2120666 E-mail: runlaicrm@run-xin.com